

Biological microscopes for students B-150 B-151 / B-153 / B-155 / B-157 / B-159 B-150POL-M / B-150POL-B

**B-150** Series Biological microscopes for students



# B-150 Series

The B-150 series has been designed to fulfill all requirements of educational laboratories. The available models are made for a pleasant and effective approach to the world of microscopy. The quality of the optics, the reliability of the mechanical parts and the excellent price/quality ratio rank these instruments at the top of their category.

IJ

B-151	Monocular microscope, 400x, fixed stage.
B-153	Monocular microscope, 600x, double layer stage.
B-155	Monocular microscope, 1000x, double layer stage.
B-157	Binocular microscope, 600x, double layer stage.
B-159	Binocular microscope, 1000x, double layer stage.
B-150POL-M	Monocular polarizing microscope, 400x, round stage.
B-150POL-B	Binocular polarizing microscope, 400x, round stage.

# B-150 Series

### **B-150**

This series is the perfect choice for students who want an innovative and easy to use product.



**Heads:** Binocular observation head, 30° inclined and 360° rotatable. Interpupillary adjustment 48-75 mm. Diopter adjustment on the left eyepiece.

Monocular observation head, 30° inclined and 360° rotatable. **Focusing:** Coaxial coarse and fine focusing mechanism (graduation: 0.002mm) with limit stop to prevent the contact between objective and specimen. Adjustable tension of coarse focusing knob.

**Specimen stages:** Double layer mechanical sliding stage, 125x116mm, 76x30mm X-Y movement range. Specimen holder for one slide. Vernier scale on the two axes, accuracy: 0,1mm.

B-151: plain stage, 125X120mm.

**B-153 / B-155 / B-157 / B-159**: mechanical stage, 126x116mm. **B150POL-M** and **B-150POL-B**: rotatable round stage, 120mm diameter. **Illumination:** White LED; light intensity controlled by a knob on the left side of the base. LED power: 1W.

Color temperature: 6300K. LED average lifetime: approx. 50.000h External power supply: 100/240Vac, 50/60Hz. Output: 5Vdc, 500mA. **Condenser:** Abbe condenser, 1.2 N.A., precentered. **B-151**: Abbe condenser 0.65 N.A., precentered. **B150POL-M** and **B-150POL-B**: 1.2 N.A. fixed condenser.




## B-150 Series - Models

## **Polarizing models**

Microscopes designed for simple polarization analysis. Available in monocular and binocular versions. The two models are equipped with a swing-out polarizer and a slide-out analyzer as well as a rotating table. **B-150POL-M** and **B-150POL-B** are suitable for common observations with

polarized light in the educational field.



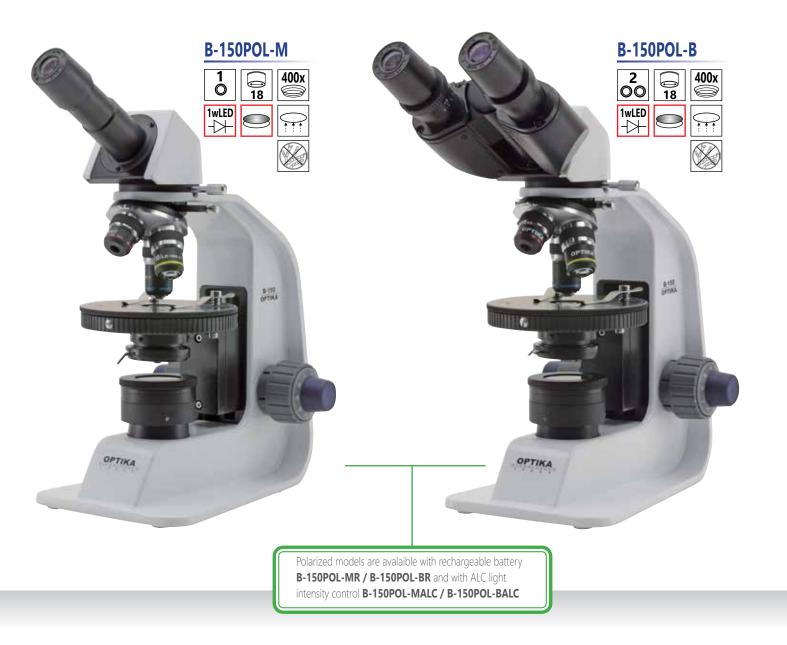

# B-150 Series - Technical specifications

Model	Head	Eyepiece(s)	Objectives	Stage	Condenser	Focusing	Illuminator
B-151	Monocular	WF10x/18mm	Achromatic 4X/10X/40X	Plain stage, 125x120mm with sample clips	0.65 N.A. fixed, with diaphragm	Coaxial coarse and fine focusing me- chanism with limit stop	1W LED with external power supply
B-153	Monocular	WF10x/18mm	Achromatic 4X/10X/40X/60X	Mechanical stage, 125x116mm with specimen holder	1.2 N.A. with diaphragm	Coaxial coarse and fine focusing me- chanism with limit stop	1W LED with external power supply
B-155	Monocular	WF10x/18mm	DIN Achromatic 4x/10X/40X/100X	Mechanical stage, 125x116mm with specimen holder	1.2 N.A. with diaphragm	Coaxial coarse and fine focusing me- chanism with limit stop	1W LED with external power supply
B-157	Binocular	WF10x/18mm	Achromatic 4X/10X/40X/60X	Mechanical stage, 125x116mm with specimen holder	1.2 N.A. with diaphragm	Coaxial coarse and fine focusing me- chanism with limit stop	1W LED with external power supply
B-159	Binocular	WF10x/18mm	DIN Achromatic 4x/10X/40X/100X	Mechanical stage, 125x116mm with specimen holder	1.2 N.A. with diaphragm	Coaxial coarse and fine focusing me- chanism with limit stop	1W LED with external power supply
B-150POL-M	Monocular	WF10x/18mm	DIN Achromatic 4X/10X/40X	Rotatable stage, 120mm diameter	1.2 N.A. fixed, with diaphragm	Coaxial coarse and fine focusing me- chanism with limit stop	1W LED with external power supply. Rotatable swing-out polarizer, slide- out analyzer
B-150POL-B	Binocular	WF10x/18mm	DIN Achromatic 4X/10X/40X	Rotatable stage, 120mm diameter	1.2 N.A. fxed, with diaphragm	Coaxial coarse and fine focusing me- chanism with limit stop	1W LED with external power supply. Rotatable swing-out polarizer, slide- out analyzer



## **B-150** Series - Accessories

#### **B-150**

M-001	Eyepiece H5x.
M-002.1	Eyepiece WF10x/18mm.
M-003	Eyepiece WF16x/12mm.
M-004	Eyepiece with micrometer WF10x/18mm.
M-008	Eyepiece with pointer WF10x/18mm.
M-137	Achromatic objective 4x/0,10.
M-138	Achromatic objective 10x/0,25.
M-139	Achromatic objective 20x/0,40.
M-141	Achromatic objective 40x/0,65.
M-142	Achromatic objective 60x/0,80.
M-143	Achromatic objective 100x/1,25 (Oil).
M-040	Attachable mechanical stage.
M-155	Polarising set (filters only).
M-031	Dust cover type 3.
M-069	Solar battery pack.
M-114	CCD camera adapter 0,45x.
M-116	CCD camera adapter 0,50x.
M-173	Photo adapter for APS-C and Full Frame Reflex cameras.
15008	OPTIKA immersion oil 10ml.



How to connect the cameras to our microscopes. Please refer to the Adapter reference list on Digital section.

#### 15104 - Lens cleaner, 50ml

without leaving residue or odor. Ideal for precision lens or prism cleaning.





Included battery: rechargeable - Lithium-Poly. Capacity: 2600 mAh. Output voltage: 5,5Vdc. Dimensions: 120x73x10 mm. Autonomy: over 6 hours at medium intensity (X-LED<sup>3</sup>) Charging modes: with solar panel (12h), with external USB power supply (not included) or from PC USB port (5h).



Headquarters and Manufacturing Facilities

#### **OPTIKA<sup>®</sup> S.r.I.**

Optika Sales branches

**OPTIKA**<sup>®</sup> Spain **OPTIKA**<sup>®</sup> China spain@optikamicroscopes.com china@optikamicroscopes.com

#### **OPTIKA**<sup>®</sup> USA **OPTIKA**<sup>®</sup> Hungary

Via Rigla, 30 - 24010 Ponteranica (BG) - ITALIA - Tel.: +39 035.571.392 - Fax: +39 035.571.435 - info@optikamicroscopes.com

usa@optikamicroscopes.com hungary@optikamicroscopes.com





