

**DIGITAL** *microscopes and cameras*





○ DM SERIES - Digital microscopes page 217

○ VIDEO AND PHOTO APPLICATIONS - Video and photo cameras page 229



# Icons

 1	Monocular	 400x	Magnification 400X	 X-LED <sup>2</sup>	X-LED <sup>2</sup> illuminator
 2	Binocular	 1000x	Magnification 1000X	 X-LED <sup>3</sup>	X-LED <sup>3</sup> illuminator
 3	Trinocular		Incident light	 X-LED <sup>8</sup>	X-LED <sup>8</sup> illuminator
 16	Field number 16		Transmitted light	 1WLED	1W LED illuminator
 18	Field number 18		Polarized light	 LED	LED illuminator
 20	Field number 20		Halogen lamp		Automatic light control
 22	Field number 22		Incandescant lamp	 IOS	Infinity-corrected optics
 24	Field number 24		Dichroic lamp		Rechargeable battery
 360°	Rotating head 360°	 USB	USB connection		Anti-fungus treatment

## DM Series

Digital microscopes



## DM Series

The OPTIKA digital microscopes DM are equipped with a camera which is integrated in the head of the microscope, as well as the traditional characteristics of quality and robustness.

The entire DM series, from models dedicated to teaching to those intended for laboratory use, is equipped with "plug & play" software. This series is the ideal solution for capturing images and video and transfer them to a PC.


<b>DM-5</b>	Digital Monocular microscope 480Kpixels (software included).
<b>DM-5UP</b>	Digital Monocular microscope 480Kpixels, USB powered (software included).
<b>B-150DM</b>	Digital monocular microscope 400x, 1.3Mp, double layer stage (software included).
<b>B-150DMR</b>	Digital monocular microscope 400x, 1.3Mp, double layer stage, with rechargeable batteries (software included).
<b>B-150DB</b>	Digital binocular microscope 1000x, 3.2Mp, double layer stage (software included).
<b>B-150DBR</b>	Digital binocular microscope 1000x, 3.2Mp, double layer stage, with rechargeable batteries (software included).
<b>B-190TB</b>	Upright digital microscope, achromatic objectives. With Tablet PC.
<b>B-290TB</b>	Upright digital microscope, E-PLAN objectives, belt-drive stage. With Tablet PC.
<b>SZM-D</b>	Digital stereozoom microscope 7x...45x, halogen incident & transmitted illumination, with 1.3Mpixels...




# DM Series - Models




**DM-5**




**DM-5UP**



**B-150DM**




**B-150DB**



# DM Series - DM-5



## DM-5



The DM-5 is the "entry level" model of the DM series and it is ideal for primary schools.

Its ease of use combined with high quality construction and first choice optical system, make the study of biology a pleasant experience.

The DM-5 is supplied with everything needed for immediate use without the need for additional accessories.

# DM Series - DM-5

<b>Head:</b>	Digital, monocular, 360° rotating, 45° inclined
<b>Eyepiece:</b>	WF10x/16mm
<b>Nosepiece:</b>	Triple, reversed
<b>Objectives:</b>	Achromatic 4x (0.10), 10x (0.25), 40x (0.65)
<b>Stage:</b>	Rotating round stage dia. 90mm; moving range: 5mm; slide clips
<b>Focusing:</b>	Coarse and fine with different axis
<b>Illumination:</b>	White LED, non-rechargeable, with brightness control
<b>Digital camera resolution:</b>	640x480
<b>Output:</b>	2.0 USB port
<b>Software:</b>	OPMIAS (Optika Micro Image Analysis Software), for Windows XP/Vista/Win7, Win8, 32-64 bit
<b>Packing:</b>	Carton box with inner foam



**DM-5**

1	16	360°
400x	LED	USB

# DM Series - DM-5UP

**Monocular digital microscope**

Same as DM-5, but with illuminator powered by your PC through USB connection.



**USB POWERED  
OR EXTERNALLY POWERED**

**DM-5UP**

1	16	400x
LED	USB	



# DM Series - B-150DM / B-150DMR


The microscopes B-150DM and B-150DB are built to meet the needs of secondary schools.

The integration of a digital camera, the quality of the optics and mechanics, and the rich equipment of these microscopes make them the best solution for the interactive training.

B-150DM and B-150BM are provided with everything necessary to allow immediate use without the need for additional accessories.



## B-150DM



<b>Head:</b>	Digital, Monocular, 360° rotating, 45° inclined
<b>Eyepiece:</b>	WF10X/18mm
<b>Nosepiece:</b>	Quadruple
<b>Objectives:</b>	Achromatic 4x (0.10), 10x (0.25), 40x (0.65).
<b>Working stage:</b>	Double layer with mechanical sliding stage, 125x115mm, moving range: 50x30mm
<b>Condenser:</b>	1.25 N.A. Abbe type
<b>Focusing system:</b>	Coaxial coarse and fine, with focusing stop mechanism
<b>Illumination:</b>	1W White LED, non-rechargeable, with brightness control
<b>Digital camera resolution:</b>	1280x1024 pixels (1.3Mp)
<b>Output:</b>	2.0 USB port
<b>Software:</b>	OPTIKA Vision Lite for Windows XP/Vista, Win7, Win8, 32-64 bit
<b>Packing:</b>	Carton box with inner foam

# DM Series - B-150DB / B-150DBR



<b>Head:</b>	Digital, Binocular, 360° rotating, 30° inclined
<b>Eyepiece:</b>	WF10X/18mm
<b>Nosepiece:</b>	Quadruple
<b>Objectives:</b>	Achromatic 4x (0.10), 10x (0.25), 40x (0.65), 100x (1.25).
<b>Working stage:</b>	Double layer with mechanical sliding stage, 125x115mm, mov. range 50x30mm
<b>Condenser:</b>	1.25 N.A. Abbe type
<b>Focusing system:</b>	Coaxial coarse and fine, with focusing stop mechanism
<b>Illumination:</b>	1 watt white LED, non-rechargeable, with brightness control
<b>Digital camera resolution:</b>	2048x1536 pixels (3.14Mp)
<b>Output:</b>	2.0 USB port
<b>Software:</b>	OPTIKA Vision Lite for Windows XP/Vista, Win7, Win8, 32-64 bit
<b>Packing:</b>	Carton box with inner foam

## R - Rechargeable battery


B-150DMR and B-150DBR comes with an internal rechargeable battery for use on field.



**B-150DB**

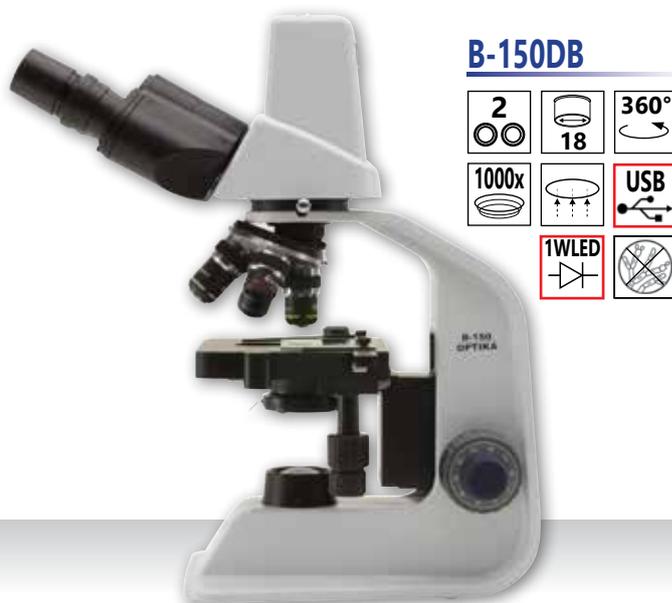

**B-150DB**



# DM Series - Technical specifications

	DM-5	B-150DM	B-150DB
<b>Resolution</b>	640x480 pixels	1280x1024 pixels (1.3Mp)	2048x1536 pixels (3.14Mp)
<b>Sensor</b>	1/4"CMOS	1/3,2"CMOS	1/2,5"CMOS
<b>Pixel size</b>	7,9x7,9 µm	2,8x2,8 µm	2,2x2,2 µm
<b>Resolution &amp; Frame Rate</b>	640x480 - 25 fps	1280x1024 - 15 fps	2048x1536 - 4 fps
		640x480 - 30 fps	1280x1024 - 8 fps
			640x480 - 30 fps
<b>Sensitivity</b>	2.0 V/Lux-sec	1.0 V/Lux-sec	1.0 V/Lux-sec
<b>White Balance</b>	Auto / Manual	Auto / Manual	Auto / Manual
<b>S/N Ratio</b>	≥ 50 dB	≥ 42 dB	≥ 40 dB
<b>Dynamic Range</b>	≥ 60 dB	≥ 71 dB	≥ 66 dB
<b>Digital Port</b>	USB 2.0	USB 2.0	USB 2.0
<b>Imaging Software</b>	OPMIAS	OPTIKA Vision Lite	OPTIKA Vision Lite
<b>System Requirements</b>	Operating system: Windows XP, Vista, Win7, Win8, 32-64 bit		

# DM Series - Accessories

## DM-5 - DM5UP

- M-044 Eyepiece WF10x/16mm.
- M-727 Achromatic objective 4x/0,10.
- M-728 Achromatic objective 10x/0,25.
- M-729 Achromatic objective 40x/0,65.
- M-030 Dust cover type 1.

## B-150DM - B-150DB - B-150DMR - B-150DBR

- M-001 Eyepiece H5x.
- M-002.1 Eyepiece WF10x/18mm.
- M-003 Eyepiece WF16x/12mm.
- M-004 Eyepiece with micrometer WF10x/18mm.
- M-137 Objective Achromatic 4x/0,10.
- M-138 Objective Achromatic 10x/0,25.
- M-139 Objective Achromatic 20x/0,40.
- M-141 Objective Achromatic 40x/0,65.
- M-142 Objective Achromatic 60x/0,80.
- M-143 Objective Achromatic 100x/1,25 (Oil).
- M-114 CCD camera adapter 0,45x.
- M-116 CCD camera adapter 0,50x.
- M-031 Dust cover type 3.
- M-173 Photo adapter for APS-C and Full Frame Reflex cameras.

## 15104 - Lens cleaner, 50ml

It cleans glass quickly and effectively, without leaving residue or odor. Ideal for precision lens or prism cleaning.




**How to connect the cameras to our microscopes.**  
Please refer to the Adapter reference list on Digital section.

# DM Series - B-190TB - B-290TB - BEYOND DIGITAL

The latest Digital Microscopes with Tablet PC from Optika open new microscopy horizons. Our Microscopes combine high-end optics with innovative Digital Technology for microscopic imaging.



## B-290TB



### Optical system:

The optical system has been developed for demanding users; it consists of high quality components which guarantee an high image contrast and an excellent optical resolution. The optical components have been designed and treated with special techniques to prevent the formation of moulds and fungi.

### Head:

Binocular version available.

The heads are equipped with interpupillary distance control (48-75 mm) as well as with dioptic compensation. All heads are 360° rotatable and 30° inclined.

### Stand:

The stand has a modern and ergonomic design. It is easy to carry the microscope thanks to the large opening behind the revolving nosepiece, to be used as a handle. The opening allows the user to see clearly the objectives and the samples, as requested in discussion groups.

### Mechanics:

The moving parts are made by means of machine tools with computerized numerical control reducing manufacturing tolerance and increasing the reliability of the instrument. The strict controls on materials and production processes are optimized through the procedures established by ISO 9001:2008 quality system.

### Illumination:

#### B-190TB:

X-LED<sup>2</sup> type with white LED; light intensity control using a knob on left side of the frame.

LED power 3W, comparable to a 30-35W halogen bulb.

#### B-290TB:

X-LED<sup>3</sup> type with white LED; light intensity control using a knob on left side of the frame.

LED power 3.6W, comparable to a 50W halogen bulb.

### Camera:

Digital camera resolution: 3.14 MegaPixels

Signal output: USB 2.0 - Sensor size: 1/2.5"

Sensor technology: CMOS - Image format: 4/3

Full Image Size: 2048x1536. NO driver (microsoft driver).

Capture features: continuous auto exposure, image size, image capture, compressed video capture.

Control parameters: brightness, gain, exposure time, colors, color enhancement.

### Tablet PC:

Equipped with Windows 8.1 operating system.

Included: Image Analysis software OPTIKA VISION LITE, full screen function is also included for a wider camera Live View.

2GB standard memory. 32GB capacity flash memory.

8" screen size. Tablet PC with OPTIKA detachable system.

# DM Series - B-190TB

The B-190 series is the result of a perfect fusion between years of experience in the microscopy field and a refined design study. This series represents our product philosophy at its best: **Quality, Reliability and Innovation.** Optika is glad to introduce a new member of this key series: The **B-190TB.**



- Head:** Binocular Digital observation head, inclined 30° and rotatable 360°.
- Eyepiece:** Widefield eyepieces WF10X/18 with field number 18mm.
- Nosepiece:** Quadruple revolving nosepiece, rotation on ball bearings.
- Objectives:** Achromatic DIN 4x (0.10), 10x (0.25), 40x (0.65), 100X (1.25).
- Working stage:** Double layer with mechanical sliding stage, size 125x115mm, X-Y movement range 70x30, specimen holder for one slide.
- Condenser:** Abbe condenser, N.A. 1,25 precentered
- Focusing system:** Coaxial coarse and fine, with focusing stop mechanism
- Illumination:** Light source type X-LED<sup>2</sup> with white LED; light intensity control using a knob on left side of the frame. LED power 3W, comparable to a 30-35W halogen bulb.

## Easily detachable from the microscope



**360°  
Rotating**



# DM Series - B-290TB

This series incorporates all the experience gathered by OPTIKA Microscopes in the field of light microscopy, adapted specifically for routine laboratory brightfield applications.

These microscopes are suitable for routine microscopy and have an ergonomic design for comfortable long-term use.

Optika is glad to introduce a new member of this key series: The **B-290TB**.

- Head:** Binocular Digital observation head, inclined 30° and rotatable 360°.
- Eyepiece:** Widefield eyepieces WF10X/20 with field number 20.
- Nosepiece:** Quadruple revolving nosepiece, rotation on ball bearings.
- Objectives:** E-Plan 4x (0.10), 10x (0.25), 40x (0.65), 100X (1.25).
- Working stage:** Double layer with mechanical sliding stage, size 150x133mm, X-Y movement range 75x50mm, specimen holder for one slide. Belt drive in X direction.
- Condenser:** Abbe condenser, N.A. 1,25 precentered
- Focusing system:** Coaxial coarse and fine, with focusing stop mechanism
- Illumination:** Light source X-LED<sup>3</sup> type with white LED; light intensity control using a knob on left side of the frame. LED power 3.6W, comparable to a 50W halogen bulb.



360°  
Rotating



# DM Series - B-190TB/B-290TB

## Tablet specifications

### **OPERATING SYSTEM**

OS Windows 8.1

### **PROCESSOR AND CHIPSET**

Processor manufacturer Intel  
 Processor Type Atom  
 Model Z3740  
 Speed 1,33 GHz  
 Processor Core Quad core (4 Core)

### **MEMORY**

Standard Memory 2 GB  
 Memory Technology LPDDR3  
 Memory Card Reader Yes  
 Supported memory microSD

### **STORAGE**

Capacity flash memory 32 GB

### **DISPLAY AND GRAPHICS**

Screen Size 20,3 cm (8")  
 Screen Type LCD color TFT  
 Screen Mode WXGA  
 Screen Resolution 1280 x 800  
 Backlight technology LED  
 Touchscreen Yes  
 Multi-touch screen Yes  
 Graphics Controller Manufacturer Intel  
 Graphics Controller Model HD Graphics  
 Graphics Memory Technology LPDDR3  
 Graphics Memory Accessibility Shared

### **NETWORK & COMMUNICATION**

LAN wireless Yes

Wireless LAN standard IEEE 802.11a/g/n

Bluetooth Yes

Standard Bluetooth 4.0

### **INTERFACES / PORTS**

HDMI Yes

### **INPUT DEVICES**

Keyboard Type Touchscreen

### **BUILT-IN DEVICES**

Microphone Yes

### **SOFTWARE**

Operating System Windows 8.1,  
 Microsoft office,  
 Home & Student 2013  
 Operating System Architecture 32-bit  
 Image Analysis software OPTIKA VISION LITE

### **BATTERY INFORMATION**

Number of Cells 2-cell  
 Battery Chemistry Lithium Polymer  
 Battery Capacity 4960 mAh

### **POWER DESCRIPTION**

Maximum Power Supply Wattage 10 W

### **WEIGHT AND DIMENSIONS**

Thickness 11,5 mm  
 Width 219 mm  
 Height 135 mm  
 Weight (Approximate) 415 g

### **ACCESSORIES**

Touch-pen



## DM Series - Accessories

### **B-190TB**

- M-001 Eyepiece H5x.
- M-002.1 Eyepiece WF10x/18mm.
- M-003 Eyepiece WF16x/12mm.
- M-004 Eyepiece with micrometer WF10x/18mm.
- M-008 Eyepiece with pointer WF10x/18mm.
- M-137 Objective Achromatic 4x/0,10.
- M-138 Objective Achromatic 10x/0,25.
- M-139 Objective Achromatic 20x/0,40.
- M-141 Objective Achromatic 40x/0,65.
- M-142 Objective Achromatic 60x/0,80.
- M-143 Objective Achromatic 100x/1,25 (Oil).

- M-190 Polarising set (filters only).
- M-031 Dust cover type 3.
- M-069 Solar battery pack.
- M-974 Blue filter, 32 mm diameter.
- M-976 Green filter, 32 mm diameter.
- M-978 Yellow filter, 32 mm diameter.
- M-988 Frosted glass filter, 32 mm diameter.
- 15008 OPTIKA immersion oil 10ml.

# DM Series - B-190TB/B-290TB

## Camera specifications

### CAMERA SPECIFICATIONS

Digital camera resolution	3.14 MegaPixels
Analog camera resolution	NO
Signal output	USB 2.0
Audio Signal	NO
Sensor Size	1/2.5"
Sensor technology	CMOS
Image format	4\3
Full Image size	2048 x 1536
Pixel size	2,2 x 2,2 micron
Frame rate full resolution	5 frames\sec
Frame rate other resolutions	8 FPS (1280x1024) 30FPS (640x480)
Sensitivity	0,53 V/Lux-second (550 nm)
Signal / noise ratio	40 dB
Dynamic range	66.5 dB
Max Exposure time	1,5 sec
ADC conversion	12 BIT
Color Depth	8 BIT
On camera IR Filter	680 nm
Automatic White Balance	Auto - Man
Automatic Gain Control	Auto - Man
Automatic Back light control	Auto - Man
Exposure control	Auto - Man

### ACCESSORIES

Calibration Slide	YES
-------------------	-----

### SOFTWARE SPECIFICATIONS

#### Supplied Software:

Optika Vision Lite (full screen function is also included for a wider camera Live View)

#### Driver type:

No driver (microsoft driver)

#### Capture features:

Continuous auto exposure, image size, image capture, compressed video capture.

#### Control parameters:

Brightness, gain, exposure time, colors, color enhancement.

### GENERAL SPECIFICATIONS

Working temperature	+0 up to +60°C
Storage temperature	-20 up to +70°C
Relative Humidity	45% up to 85%

## DM Series - Accessories

### **B-290TB**

M-160	Eyepiece WF10x/20mm.
M-161	Eyepiece WF15x.
M-162	Eyepiece WF20x.
M-163	Micrometer eyepiece WF10x/20mm.
M-164	Objective 4x/0,10 E-PLAN.
M-165	Objective 10x/0,25 E-PLAN.
M-166	Objective 20x/0,40 E-PLAN.
M-167	Objective 40x/0,65 E-PLAN.
M-168	Objective 60x/0,80 E-PLAN.
M-169	Objective 100x/1,25 E-PLAN (Oil).

M-174	Polarizing set, filters only (for B-290 series).
M-175	Rotating table for polarizing set.
M-069	Solar battery pack.
M-666.290	Heating stage, with digital temperature controller B-290 series.

# DM Series - SZM-D

The stereomicroscopes of the SZM series are instruments specifically designed for laboratory and industry applications. Their optical and mechanical qualities place them at the top of that sought-after category of appliances and the price/quality ratio is exceptionally good.

Sharing the same optical system consisting of binocular and trinocular heads with zoom objectives, the four models of the SZM series find their proper application wherever professional instruments are required at a particularly contained cost.

The numerous accessories provide an ample choice of possible configurations and extend the flexible use of the instruments.

SZM-D stereozoom microscope is our best option when an ease of use and a good quality for the image are required.

By using the built-in camera with its USB port the connection with the pc will be simple and quick.

## SZM-D



# DM Series - SZM-D Model Technical specifications

Model	Head	Objectives	Stand	Illumination
<b>SZM-D</b>	Binocular	0,7x.... 4,5x Zoom	Pillar stand	Incident and transmitted 12V/15W halogen with separated brightness controls

## Technical specifications of the built-in camera

<b>Resolution</b>	1280 x 1024 pixels (1,3 Mpixels)
<b>Sensor</b>	CMOS 1/3"
<b>Pixel Size</b>	5.2 µm x 5.2 µm
<b>Imaging Area</b>	6.67 mm x 5.33 mm
<b>Frame Rate at Full Resolution</b>	15 frames/sec
<b>Frame Rate at 640x480</b>	30 frames/sec
<b>Optical Format</b>	1/2"
<b>Aspect Ratio</b>	4:3
<b>S/N Ratio</b>	44 dB
<b>Dynamic Range</b>	71 dB
<b>ADC</b>	10 bit
<b>Data Output (Uncompressed Video)</b>	3x8 bit
<b>Exposure Range</b>	0-70 msec
<b>Sensitivity</b>	1,0V/Lux-second
<b>C-Mount Lens Adapter</b>	no
<b>System Requirements</b>	Windows XP/Vista, Win7, Win8, 32 & 64Bit , USB 2.0
<b>Software</b>	Optika Vision Lite, Optika view, TWAIN interface, several freeware for image elaboration
<b>Capture Features</b>	Continuous auto white balance, continuous auto exposure
<b>Included with the camera</b>	Optika Vision Lite package, 1.5 m USB cable.



# DM Series - Accessories

## SZM-D

- ST-081 Eyepieces (pair) WF10x/20 mm.
- ST-082 Eyepieces (pair) WF15x/15 mm.
- ST-083 Eyepieces (pair) WF20x/10 mm.
- ST-084 Micrometric eyepiece WF10x/20 mm.
- ST-085 Additional lens 0,5x (w.d. 165mm).
- ST-091 Additional lens 0,75x (w.d. 117mm).
- ST-086 Additional lens 1,5x (w.d. 47mm).
- ST-087 Additional lens 2x (w.d. 26mm).
- ST-088 Polarising set (filters and rotating stage).
- ST-040 Darkfield condenser.
- ST-041 Sample clip.
- ST-100 Hand moving stage.
- ST-036 Eye cups (pair) type 2.
- ST-012 White/black object-plate, type 2 dia. 95 mm.
- ST-014 Glass stage, type 2, dia. 95 mm.
- ST-038 Halogen bulb, 12V/15W.
- ST-037 Halogen bulb, 12V/15W, with dichroic mirror.
- ST-033 Dust cover type 13.
- M-114 CCD camera adapter 0,45x.
- M-116 CCD camera adapter 0,50x.
- M-173 Photo adapter for APS-C and Full Frame Reflex cameras.
- M-113.1 Ring adapter, 30mm (for monocular and binocular microscopes).

## 15104 - Lens cleaner, 50ml

It cleans glass quickly and effectively, without leaving residue or odor. Ideal for precision lens or prism cleaning.



### How to connect the cameras to our microscopes.

Please refer to the Adapter reference list on Digital section.



**VIDEO AND PHOTO APPLICATIONS**

OPTIKAM B05 / OPTIKAM B1 / OPTIKAM B2 / OPTIKAM B3  
OPTIKAM B5 / OPTIKAM B9 / OPTIKAM PRO 3LT  
OPTIKAM PRO3 / OPTIKAM PRO 5LT / OPTIKAM PRO 5 / OPTIKA  
PRO HDMI / OPTIKAM PRO COOL 5 / DIGI / TB-3W / TB-5W /  
EDUCAM SERIES / VC SERIES

## VIDEO AND PHOTO APPLICATIONS

Video and photo cameras



# Video and photo applications

A wide range of instruments fulfilling any requirement in the photo/video field. It has never been so easy to get impressive images from your microscope. Thanks to different resolutions, all digital cameras (to be used with PC or TV set) can meet the demands of either a professional user or people who are looking for an economic but valuable product.

Several models (OPTIKAM B2, Pro LT models, and pro Cool 5) are designed to be used on trinocular microscopes by using specific adapters (optional accessories). It will be easy to connect these instrument to any microscope, biological or stereo, by C-mount.

The models with optical eyepiece adapter are ready to be used (by means of one of the two eyepieces) on monocular and binocular microscopes too, both biological and stereo.

## **OPTIKAM Budget Series**

USB cameras for general purpose (software included).

## **OPTIKAM Pro Series**

High Performance USB cameras with advanced software package.

## **OPTIKAM Pro HDMI**

High Performance Full HD HDMI camera.

## **OPTIKAM Pro Cool**

Very high-sensitive USB camera with cooled CCD (software included).

## **DIGI**

Universal photo & video (1080p) camera (software included).

## **TB Series**

Tablet PC with C-mount integrated camera (software included).

## **EDUCAM Series**

Multimedia cameras.

## **VC Series**

CCD videocameras for general purpose.



# Video and photo applications - OPTIKAM BUDGET

<b>OPTIKAM B05 - 4083.B05</b>	<b>Eyepiece Camera</b>
Sensor	CMOS 1/4"
Resolution	640x480 pixels
Frame Rate	30 frames/sec
Optical Format	1/4"
Aspect Ratio	4:3
S/N Ratio	45 dB
Dynamic Range	60 dB
Sensitivity	1,9 V/Lux-second
C-Mount	No
Adapters for stereomicroscopes	30 and 30,5 mm diameter
Calibration slide	None
System Requirements	Windows XP/Vista, Win7, Win8, 32-64 bit, USB port 2.0
Software	Optika Vision Lite / OPTIKA MIPro
Capture Features	Continuous auto white balance, continuous auto exposure
Accessories included	1.5 m USB cable, installation manual, CD-Rom

OPTIKAM B05



OPTIKAM B2



<b>OPTIKAM B1 - 4083.B1</b>	<b>C-mount and Eyepiece Camera</b>
Sensor	CMOS 1/2.5"
Resolution	1272 x 952 pixels (1,21 Mpixels)
Frame Rate at Full Resolution	19 frames/sec
Frame Rate 640x480	52 frames/sec
Optical Format	1/3"
Aspect Ratio	4:3
S/N Ratio	44 dB
Dynamic Range	60 dB
Sensitivity	1,0 V/Lux-second
C-Mount:	Yes
Optical adapter	0,45x (for 23mm eyepiece tube)
Adapters for stereomicroscopes	30 and 30,5 mm diameter
Calibration slide	76x24mm micrometric calibration slide
System Requirements	Windows XP/Vista, Win7, Win8, 32-64 bit, USB port 2.0
Software	Optika Vision Lite / OPTIKA IsView
Capture Features	Continuous auto white balance, continuous auto exposure
Accessories included	1.8 m USB cable, installation manual, CD-Rom

OPTIKAM B1



OPTIKAM B5



Special model designed for trinocular microscopes only. This camera does not include any optical adapter for biological microscopes or stereomicroscopes. Especially designed for heavy applications, the Optikam B-2 is very robust and does not need the installation of any driver in your computer.

<b>OPTIKAM B2 - 4083.B2</b>	<b>C-mount Camera</b>
Sensor	CMOS 1/3.2"
Resolution	1600 x 1200 pixels (2 Mpixels)
Frame Rate at Full Resolution	10 frames/sec
Frame Rate at 640x480	30 frames/sec
Optical Format	1/3,2"
Aspect Ratio	4:3
S/N Ratio	42,3 dB
Dynamic Range	71 dB
Sensitivity	1,0 V/Lux-second
C-Mount:	Yes
Optical adapter	None
Adapters for stereomicroscopes	None
Calibration slide	76x24mm micrometric calibration slide
System Requirements	Windows XP/Vista, Win7, Win8, 32-64 bit, USB port,
Software	Optika Vision Lite / OPTIKA MIPro
Capture Features	Continuous auto white balance, continuous auto exposure
Accessories included	1.8 m USB cable, installation manual, CD-Rom

# Video and photo applications - OPTIKAM "Budget"

<b>OPTIKAM B3 - 4083.B3</b>	<b>C-mount and Eyepiece Camera</b>
Sensor	CMOS 1/2"
Resolution	2048 x 1536 pixels (3,14 Mpixels)
Frame Rate at Full Resolution	6,5 frames/sec
Frame Rate at 640x480	55 frames/sec
Optical Format	1/2"
Aspect Ratio	4:3
S/N Ratio	43 dB
Dynamic Range	61 dB
Sensitivity	1,0 V/Lux-second
C-Mount	Yes
Optical adapter	0,5x (for eyepiece tube)
Adapters for stereomicroscopes	30 and 30,5 mm diameter
Calibration slide	76x24mm micrometric calibration slide
System Requirements	Windows XP/Vista, Win7, Win8, 32-64 bit, USB port 2.0
Software	Optika Vision Lite / OPTIKA IsView
Capture Features	Continuous auto white balance, continuous auto exposure
Accessories included	1.8 m USB cable, installation manual, CD-Rom



<b>OPTIKAM B5 - 4083.B5</b>	<b>C-mount and Eyepiece Camera</b>
Sensor	CMOS 1/2,5"
Resolution	2592 x 1944 pixels (5 Mpixels)
Frame Rate at Full Resolution	7 frames/sec
Frame Rate at 640x480	46 frames/sec
Optical Format	1/2,5"
Aspect Ratio	4:3
S/N Ratio	38 dB
Dynamic Range	70,1 dB
Sensitivity	0,53 V/Lux-second
C-Mount	Yes
Optical adapter	0,45x (for eyepiece tube 23mm)
Adapters for stereomicroscopes	30 and 30,5 mm diameter
Calibration slide	76x24mm micrometric calibration slide
System Requirements	Windows XP/Vista, Win7, Win8, 32-64 bit, USB port 2.0
Software	Optika Vision Lite / OPTIKA IsView
Capture Features	Continuous auto white balance, continuous auto exposure
Accessories included	1.8 m USB cable, installation manual, CD-Rom



<b>OPTIKAM B9 - 4083.B9</b>	<b>C-mount and Eyepiece Camera</b>
Sensor	CMOS 1/2,3"
Resolution	3664 x 2740 pixels (10 Mpixels)
Frame Rate at Full Resolution	3 frames/sec
Frame Rate at Middle Resolution(1,3Mp)	25 frames/sec
Frame Rate at 640x480	30 frames/sec
Optical Format	1/2,3"
Aspect Ratio	4:3
S/N Ratio	40,5 dB
Dynamic Range	63 dB
Sensitivity	0,44 V/Lux-second
C-Mount	Yes
Optical adapter	0,45x (for 23mm eyepiece tube)
Adapters for stereomicroscopes	30 and 30,5 mm diameter
Calibration slide	76x24mm micrometric calibration slide
System Requirements	Windows XP/Vista, Win7, Win8, 32-64 bit, USB port 2.0
Software	Optika Vision Lite / OPTIKA IsView
Capture Features	Continuous auto white balance, continuous auto exposure
Accessories included	1.8 m USB cable, installation manual, CD-Rom



# Video and photo applications - OPTIKAM Pro Series

## Hi-Performance cameras with advanced software package

C-mount cameras for video and still-image capturing with high performances. These cameras are delivered with our complete OPTIKA VISION SOFTWARE PACKAGE.

LT versions do not include any eyepiece adapter.


Ideal for professional trinocular microscopes.



	<b>OPTIKAM PRO 3LT 4083.11LT</b>	<b>OPTIKAM PRO 3 4083.11</b>	<b>OPTIKAM PRO 5LT 4083.12LT</b>	<b>OPTIKAM PRO 5 4083.12</b>
<b>Resolution</b>	2048 x 1536 pixels (3.2 Mpixel)		2560 x 1920 (5.0 Mpixel)	
<b>Sensor</b>	CMOS 1/2"		CMOS 1/2.5"	
<b>Pixel Size</b>	3.2 μm x 3.2 μm		2.2 μm x 2.2 μm	
<b>Image Area</b>	6.55 mm x 4.92 mm		5.70 mm x 4.28 mm	
<b>Frame Rate at Full Resolution</b>	12 frames/sec		3 frames/sec	
<b>Frame Rate at Half Resolution</b>	24 frames/sec		12 frames/sec	
<b>Optical Format</b>	1/2"		1/2"	
<b>Aspect Ratio</b>	4:3		4:3	
<b>S/N Ratio</b>	43 dB max		43 dB max	
<b>ADC</b>	10 bit		10 bit	
<b>Data Output (Uncompressed Video)</b>	3x8 bit		3x8 bit	
<b>Sensitivity</b>	1.0 V/Lux-second		0.53 V/Lux-second	
<b>System Requirements</b>	Windows XP, Vista, Win7, Win8, 32-64bit, USB 2.0 port		Windows XP, Vista, Win7, Win8 32-64bit, USB 2.0 port	
<b>Software</b>	OPTIKA Vision Pro Plus, TWAIN interface, SDK		Optika Vision Pro, TWAIN interface, SDK	
<b>Capture Features</b>	Continuous auto white balance, continuous auto exposure, averaging, subsampling (decimation)		Continuous auto white balance, continuous auto exposure, averaging, subsampling (decimation)	
<b>Optical adapter</b>	None	0.45x with additional ring adapter for stereomicroscopes	None	0.45x with additional ring adapter for stereomicroscopes
<b>Included with the camera</b>	3 m USB cable, 76x24mm micrometric calibration slide, C-mount cap, box		3 m USB cable, 76x24mm micrometric calibration slide, C-mount cap, box	
<b>Max exposure</b>	1 sec		177 msec	
<b>Max extended exposure</b>	26 sec		428 msec	

# Video and photo applications - OPTIKAM Pro HDMI

## TV monitor + 4083.13 - B-383LD

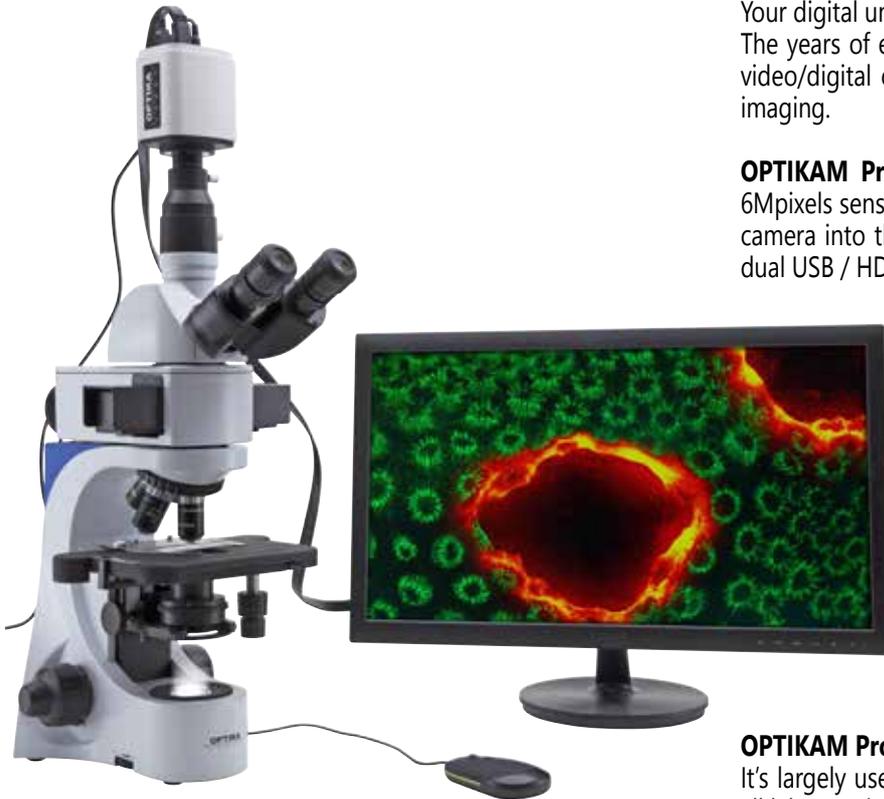

### Optikam Pro HDMI - High-performance Full HD HDMI camera

Your digital unmet needs find in **OPTIKAM Pro HDMI** their solution. The years of experience in microscopy have allowed Optika to develop a video/digital camera that meets and fulfills the diverse needs related to imaging.

**OPTIKAM Pro HDMI** is the solution. Digital camera equipped with a 6Mpixels sensor, an 8GB removable SD-card, an useful Mouse to draw the camera into the parameters set-up, C & C-short mount connections and dual USB / HDMI port.

**OPTIKAM Pro HDMI** offers the highest quality images through a simple connection to projector, TV monitor or PC monitor.

The Onboard software and the Mouse allow the user to view, select and modify the parameters of the camera with just one click, they also allows to show, compare and remove the captured images.

This innovative system provides live video images in high definition (Full HD 1080p), the ability to record photos and videos directly into the supplied SD card or connected to a PC, to exploit the full potential of the software OPTIKA IsView.

**OPTIKAM Pro HDMI** is the best solution for various applications. It's largely used in the education field, in industrial quality control and in all laboratories.

## TV monitor + 4083.13 - B-1000POL



**HDMI™**



# Video and photo applications - OPTIKAM Pro HDMI

<b>Optikam Pro HDMI - 4083.13</b>	<b>C and C-Short mount, Eyepieces Camera</b>
<b>Sensor</b>	1-2.8" Sony Cmos Sensor
<b>Resolution</b>	3264 x 1836 (6 megapixels)
<b>Image Acquisition details</b>	Truecolor, two high-speed FPGA chipsets
<b>Key Features</b>	On/Off, all the rest of features are available through the ON-BOARD software.
<b>External Ports</b>	HDMI, USB, SD-Card
<b>SD-Card</b>	Images: 3264 x 1836, Video: 1280 x 720
<b>HDMI Resolution</b>	1920 x 1080, 60fps
<b>USB Resolution</b>	1920 x 1080, 1280 x 720, 30fps
<b>USB Driver</b>	Driver free
<b>System requirements</b>	HDMI, Windows XP, Vista, Win7, Win8, 32 / 64 bit
<b>Software</b>	Optika Vision Lite, Optika IsView
<b>USB Capture features</b>	Resolution. Brightness. Contrast. Tonality. Saturation. Gamma. White Balance.
<b>HDMI features</b>	Cross. Black/white. Contrast. Sharpness. Saturation. Brightness. Gamma. Image mirror. Image browse. Zoom. Image compare. Image flip. Image mask.
<b>Power supply</b>	12V 2000mA
<b>C-mount</b>	Yes
<b>C-short mount</b>	Yes
<b>Optical Adapter</b>	None
<b>Adapters for stereomicroscopes</b>	None
<b>Calibration slide</b>	76x24mm micrometric calibration slide.
<b>Accessories included</b>	8GB SD-Card. Mouse. HDMI cable. USB cable. CD-Rom.

## TV monitor + 4083.13 - B-382ALC



# Video and photo applications - OPTIKAM Pro Cool

A new CCD cooled camera for fluorescence applications

- \* Scientific-grade CCD chip
- \* 5 Mega pixels resolution (2580x1944 pixels)
- \* 12 bit color RGB
- \* Peltier-cooled to 30° below room temperature
- \* Very long exposure time for fluorescence imaging
- \* Anti "amplifier glow" function for long exposure
- \* CNC aluminum alloy metal case



## OPTIKAM Pro Cool 5 - 4083.CL5

## CCD Cooled Camera

CCD chip manufacturer, model	Sony, ICX282AQ
CCD scan mode	Interline transfer
CCD size	2/3"
Pixels	3.4mm x 3.4mm
G sensitive	280 mV
Resolution	2580H x 1944V
Filter	RGB
C-mount	Yes
Frame Rate at Max Resolution	3 fps (2580x1944)
Frame Rate at middle Resolution	10 fps (1280x932)
Low-speed readout	Yes
A/D conversion	8/12 bit
Peltier cooling system	30°C below room temperature
Exposure control	Automatic, manual
Exposure time	0.1ms - 6 minutes
Anti "amplifier glow"	Yes
White balance	Automatic, manual
Parameter controls	Image size, brightness, gain, exposure time, white balance
Interface	USB2.0 / 480Mb/s
Dimensions	130mm x 111mm x 54mm
System Requirements	Windows XP / Vista / Win 7 / Win 8, 32-64bit, USB 2.0 port
Software	Optika View

# Video and photo applications - DIGI

OPTIKA Microscopes is pleased to introduce a new model of digital camera, fitted with USB connection and AV output for HDTV or TV set with standard resolution. All you need to capture pictures and videos from your microscope or simply from the surroundings is in this 2-in-1 model.

The advantages of the DIGI camera are the possibility to record videos and to use it as a standard digital camera, for personal use.

The camera sensor has a resolution of 5MPixels (8MPixels through interpolation), it is provided with 3X optical zoom and a very bright 2.4" LCD display.

The system also includes specific adapters that allow the use on all microscopes and stereomicroscopes models with diameter of the eyepiece holder of 23mm or 30mm. A complete software will allow you to process, file and work with the captured images.

The camera includes a 2GB SD memory card.

DIGI	Digital Photo and Video Camera
Sensor	5.0 MP 1/2.5" CCD Sensor
Resolution (PHOTO)	8Mp (3200x2400 pixels) 5Mp (2595x1944 pixels) 3Mp (2048x1536 pixels)
Resolution (VIDEO)	1440x1080 (HD 1080p, 30fps) 1280x720 (HD 720p, 60fps) 1280x720 (HD 720p, 30fps) 848x480 (480p, 60fps) 320x240 (QVGA, 30fps)
Lens	3x optical zoom lens
Digital zoom:	4x (2x in 1080p mode)
File format:	JPEG, MOV, WAV
Internal Memory:	32MB
External Memory:	2GB SD card included (up to 32GB SDHC)
LDC display:	2,4"
TV out:	HDTV Component Out, PAL/NTSC system supported
Interface:	USB 2.0
Voice Recorder:	Yes
Microphone:	Internal (stereo), mic jack
Speaker:	Yes
Nightshot:	Yes (both in still image and video modes)
E.I.S.:	Electronic Image Stabilization
C-Mount:	No
Optical adapter	10x (for eyepiece tube)
Adapters for stereomicroscopes	30,0mm diameter
Battery:	Li-Ion rechargeable
Remote Control:	Yes, IR transmission

## DIGI



# Video and photo applications - TB Series - Tablet PC with camera

"A 2 in1 solution in digital microscopy"

A Tablet PC with 10" LCD touch screen, in combination with 3Mp and 5Mp cameras; an universal system which can be installed on every trinocular microscope.

Tablet PC with OPTIKA detachable system.



## TABLET TECHNICAL SPECIFICATIONS

Model	Acer Aspire Switch 10
Operating System	Windows 8.1 32-bit
Language	Multilanguages already installed
Image capturing software	OPTIKA Vision lite
CPU	Intel® Atom™ Z3735F, Quad core (4 Core)
CPU speed	1,33 GHz
Graphics Card	Intel® HD Graphics 3D Accelerator
Memory	Ram 2,048 GB DDR3L
LCD display	LED 10.1" IPS Multi Touch Screen
LCD resolution	1280x800, 16/10 (WXGA)
Storage	Hdd 32GB
Network	Wireless IEEE 802.11 b/g/n/ + BT, Bluetooth 4.0
Input/output ports	Micro USB-B, Microphone, Micro SD card reader, Micro HDMI, Head-phone
Control Buttons	Auto rotate off, volume control
Battery Technology	Lithium-ion battery, 2x cell
Battery capacity	5700 mAh
Max load	18 W
Dimensions	Thikness 8,9 mm, Height 17,7 cm, Width 26,1 cm
Weight	585 g
Cables included	OTG cable (Micro USB-B to USB-A)
Also included	Instruction manual, Optika Software CD, Cleaning Cloth, Keyboard with touchpad, touch-pen



## CAMERA TECHNICAL SPECIFICATIONS

	TB-3W	TB-5W
Digital camera resolution	3,14 MegaPixels	5,0 MegaPixels
Analog camera resolution	NO	NO
Signal output	USB 2.0	USB 2.0
Audio Signal	NO	NO
Sensor Size	1\2"	1\2,5"
Sensor technology	CMOS	CMOS
Image format	4\3	4\3
Full Image size	2048 x 1536	2592 x 1944
Pixel size	3,2 x 3,2 micron	2,2 x 2,2 micron
Frame rate full resolution	6,5 frames/sec (2048x1536)	7 frames/sec (2592 x 1944)
Frame rate other resolutions	28 frame/sec (1024x768) 55 frames/sec (640x480)	46 frames/sec (640x480)
Sensitivity	1,0 V/Lux-second (550 nm)	0,53 V/Lux-second (550 nm)
Signal / noise ratio	43 dB	38 dB
Dynamic range	61 dB	70.1 dB



# Video and photo applications - EDUCAM® Series - Multimedia cameras

The EDUCAM® video camera is especially designed to meet the various requirements in the educational field. When it is connected to a professional monitor or simply to a TV set, EDUCAM® is able to carry out many different functions.

It can be used as an episcopes, for the reproduction of

- texts, documents, photographs
- to enlarge small objects, insects, minerals
- for video-microscopy, connected to microscopes used in biology or to stereomicroscopes
- as an overhead projector, for the projection of drawings
- as a camera for teleconferences, assemblies, meetings
- as a camera for filming, with the help of a video recorder.

Its ultra-high sensitivity enables to record clearly even in low-light conditions.

The special lens enables you to focus from 0,76 cm, up to an infinite distance. An extremely sensitive microphone (only on Multimedia models), records the teacher's voice during the lesson, or sounds and noises from the surrounding area, that can be heard via the TV itself, or via a separate amplifying system.

The microphone can be switched off if required.

The special 50-or 65-cm flexible arm (12mm dia.) and the heavy weight of the base (approx. 2.7 Kg), make EDUCAM® versatile, sturdy and stable at the same time.

The CCD camera is placed on the end of a flexible arm that can be safely twisted in any position, even projecting from the base, without affecting the system stability. A special joint allows the head to rotate without damaging the wires inside the flexible arm. All models are equipped with an external power supply and a dual adapter for video-microscopy (for biological and stereo microscopes).

For the connection to a PC, a USB video grabber is available as option (see next page, CONV-USB video grabber).

In the model EDUCAM USB, the video grabber is built-in.

**EDUCAM**



	MULTIMEDIA 4083	MULTIMEDIA PRO 4083.1	STUDENT 4083.2	STUDENT PRO 4083.3	MIC 4083.5	USB 4083.4
CCD element	1/3"	1/3"	1/3"	1/3"	1/3"	1/3"
Resolution (TV lines)	420	420	420	420	420	420
Total pixels	244.000	244.000	244.000	244.000	244.000	307.000
Signal/noise ratio	>48 dB	>48 dB	>48 dB	>48 dB	>48 dB	>48 dB
Sensitivity (lux/F1.2)	0.08lux/F1.2	0.08lux/F1.2	0.08lux/F1.2	0.08lux/F1.2	0.08lux/F1.2	0.08lux/F1.2
Electronic shutter	yes	yes	yes	yes	yes	yes
Automatic gain control	yes	yes	yes	yes	yes	yes
White balance (auto)	yes	yes	yes	yes	yes	yes
Video signal	PAL (NTSC opt.)	PAL (NTSC opt.)	PAL (NTSC opt.)	PAL (NTSC opt.)	PAL (NTSC opt.)	PAL (NTSC opt.)
USB output	-----	-----	-----	-----	-----	yes
Digital resolution	-----	-----	-----	-----	-----	640x480 pixels
Working distance	>0,76 cm	>0,76 cm	>0,76 cm	>0,76 cm	>0,76 cm	>0,76 cm
Objective	8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
Magnification	> 90x	> 90x	> 90x	> 90x	> 90x	> 90x
Microphone	yes	yes	-----	-----	-----	yes
Audio signal	analogic	analogic	-----	-----	-----	analogic
Voltage	15Vdc	15Vdc	12Vdc	12Vdc	12Vdc	15Vdc
Power adapter 230/12Vdc	included	included	included	included	included	included
Flexible arm length	50 cm	65 cm	50 cm	65 cm	-----	65 cm
Base diameter	17 cm	17 cm	17 cm	17 cm	-----	17 cm
Weight	3,4 Kg	3,5 Kg	3,3 Kg	3,4 Kg	0,4 Kg	3,5 Kg
Microscope adapters	included	included	included	included	included	included
System Requirements						Windows XP, Vista, Win 7, Win 8 32-64 Bit, USB 2.0 port

# Video and photo applications - VC Series - CCD Cameras

VC-01



VC-01  
VC-04



VC-02  
VC-03



CONV-USB



VC-05



# Video and photo applications - VC Series - CCD Cameras

Videomicroscopy system composed by a colour CCD TV camera, complete with Bio & Stereo Microscope adapter tube, integrated power supply unit, cables and manuals.

VC-01	Videomicroscopy system
Sensor	CCD SONY sensor 1/3"
Horizontal Resolution	420 TV lines (PAL)
Picture elements	500[H]x582[V]
Video output	BNC VBS 1.0Vp-p, 75 Ohm
C-Mount	C/CS
Sensitivity	0.5lux/F=1.2
Auto white balance	Yes
Auto gain control	Yes
Load current	150mA
Dimension	60x50x145mm - Weight 400g
Operating temperature	-10° to + 50°

VC-04	Videomicroscopy system
Sensor	CCD SONY sensor 1/3"
Horizontal Resolution	480 TV lines (PAL)
Picture elements	752[H]x582[V]
Video output	BNC VBS 1.0Vp-p, 75 Ohm
C-Mount	C/CS
Sensitivity	0.8lux/F=1.2
Auto white balance	Yes
Auto gain control	Yes
Load current	150mA
Dimension	60x50x145mm - Weight 400g
Operating temperature	-10° to + 50°

Colour CCD TV camera for C-Mount connection, complete with cables, SCART adapter & manual.

VC-02	Videomicroscopy system
Sensor	CCD SONY sensor 1/3"
Horizontal Resolution	420 TV lines (PAL)
Picture elements	500[H]x582[V]
Video output	BNC VBS 1.0Vp-p, 75 Ohm
C-Mount	C/CS
Sensitivity	0.5lux/F=1.2
Auto white balance	Yes
Auto gain control	Yes
Load current	150mA
Dimension	60x50x145mm - Weight 400g
Operating temperature	-10° to + 50°

VC-03	Videomicroscopy system
Sensor	CCD SONY sensor 1/3"
Horizontal Resolution	480 TV lines (PAL)
Picture elements	752[H]x582[V]
Video output	BNC VBS 1.0Vp-p, 75 Ohm
C-Mount	C/CS
Sensitivity	0.8lux/F=1.2
Auto white balance	Yes
Auto gain control	Yes
Load current	150mA
Dimension	60x50x145mm - Weight 400g
Operating temperature	-10° to + 50°

## VC-05 Eyepiece CCD camera

Simple eyepiece camera with CCD sensor. 340 TV Lines (PAL).

## CONV-USB Video Grabber

Analogic to Digital signal converter for PC.

Real time video capture from camcorder, VCR or camera. User friendly software easily stores and manages images & videos. Real time/full size Video capture window. The CONV-USB video grabber comes with a CD with drivers for Windows XP, Vista, Win7, Win8, 32-64bit.

# Adapter reference list - BUDGET Series

	With ADAPTER OPTIKAM B05	With ADAPTER OPTIKAM B1 B3 B5 B9	With NO ADAPTER OPTIKAM B2
Biological microscopes			
<b>B-20 - M-100FL (Monocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-50 (Monocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-150 (Monocular and binocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-191 (Monocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-192 (Binocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-193 (Trinocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-292 (Binocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-293 (Trinocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-382 (Binocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-383 (Trinocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-500 (Binocular head)</b>	READY TO USE	READY TO USE	M-114+M-113.1
<b>B-500 (Trinocular head)</b>	M-699	M-699	M-620.1
<b>B-500 ERGO (binocular head ONLY)</b>	READY TO USE	READY TO USE	M-114+M-113.1
<b>B-500Ti-* (Multihead) for Binocular head</b>	READY TO USE	READY TO USE	M-114+M-113.1
<b>B-500Ti-* (Multihead) for Trinocular head</b>	READY TO USE	READY TO USE	M-778
<b>B-800 &amp; B-1000 (Trinocular head)</b>	M-699	M-699	M-620.1
<b>B-800 &amp; B-1000 ERGO (Binocular head)</b>	READY TO USE	READY TO USE	M-114+M-113.1
<b>B-800 &amp; B-1000 ERGO (Trinocular head)</b>	READY TO USE	READY TO USE	M-114
<b>XDS-2 (Trinocular head)</b>	READY TO USE	READY TO USE	M-778
<b>XDS-3 (Trinocular head)</b>	M-699	M-699	M-789
<b>XDS-2ERGO (Trinocular connection)</b>	READY TO USE	READY TO USE	M-114

## Stereomicroscopes

<b>STX (Binocular head)</b>	READY TO USE	READY TO USE	M-114
<b>MS-2 (Binocular head)</b>	READY TO USE	READY TO USE	M-114
<b>S-10-20-30-40-45-50 (Binocular head)</b>	M-113.2	READY TO USE	M-114 + M-113.2
<b>LAB-10 LAB-20 (Binocular head)</b>	READY TO USE	READY TO USE	M-114 + M-113.1
<b>SZM (Binocular head)</b>	READY TO USE	READY TO USE	M-114 + M-113.1
<b>SZM (Trinocular head)</b>	READY TO USE	READY TO USE	ST-090
<b>SZN (Binocular head)</b>	READY TO USE	READY TO USE	M-114 + M-113.1
<b>SZN (Trinocular head)</b>	READY TO USE	READY TO USE	ST-147.1
<b>SZP (Binocular head)</b>	READY TO USE	READY TO USE	M-114 + M-113.1
<b>SZP (For Trinocular connection)</b>	ST-170	ST-170	ST-170 + M-114
<b>SZM-SMD (Trinocular head)</b>	READY TO USE	READY TO USE	ST-090
<b>SZM-GEM-1 (Binocular head)</b>	READY TO USE	READY TO USE	M-114 + M-113.1
<b>SZM-GEM-2 (Trinocular head)</b>	READY TO USE	READY TO USE	ST-090
<b>OPTIGEM-3 (Binocular head)</b>	READY TO USE	READY TO USE	M-114 + M-113.1
<b>OPTIGEM-4 (Trinocular head)</b>	READY TO USE	READY TO USE	ST-147.1
<b>OPTIGEM-1 (Binocular head)</b>	READY TO USE	READY TO USE	M-114 + M-113.1
<b>OPTIGEM-2 (Trinocular head)</b>	READY TO USE	READY TO USE	ST-090
<b>XC-100L (Monocular head)</b>	READY TO USE	READY TO USE	M-114
<b>XZ-1 (Monocular head)</b>	READY TO USE	READY TO USE	M-114
<b>XZ-2 (Binocular head)</b>	READY TO USE	READY TO USE	M-114

# Adapter reference list - TABLET PC and OPTIKAM Pro Series

	With ADAPTER TB-3W or TB-5W Tablet	With ADAPTER OPTIKAM PRO3 or PRO5	With NO ADAPTER OPTIKAM PRO3 or PRO5 LT
Biological microscopes	Only for TRINOPORT		Only for "c" mount - Trino microscopes
<b>B-20 - M-100FL (Monocular head)</b>	NO	READY TO USE	NO
<b>B-50 (Monocular head)</b>	NO	READY TO USE	NO
<b>B-150 (Monocular and binocular head)</b>	NO	READY TO USE	NO
<b>B-191 (Monocular head)</b>	NO	READY TO USE	NO
<b>B-192 (Binocular head)</b>	NO	READY TO USE	NO
<b>B-193 (Trinocular head)</b>	READY TO USE – FREE TO MOVE 360 DEGREE	READY TO USE	M-114
<b>B-292 (Binocular head)</b>	NO	READY TO USE	NO
<b>B-293 (Trinocular head)</b>	READY TO USE – FREE TO MOVE 360 DEGREE	READY TO USE	M-114
<b>B-382 (Binocular head)</b>	NO	READY TO USE	NO
<b>B-383 (Trinocular head)</b>	READY TO USE	READY TO USE	M-114
<b>B-500 (Binocular head)</b>	NO	READY TO USE	NO
<b>B-500 (Trinocular head)</b>	M-699	M-699	M-620.1
<b>B-500 ERGO (binocular head ONLY)</b>	NO	READY TO USE	NO
<b>B-500Ti-* (Multihead) for Binocular head</b>	NO	READY TO USE	NO
<b>B-500Ti-* (Multihead) for Trinocular head</b>	READY TO USE – FREE TO MOVE 360 DEGREE	READY TO USE	M-778
<b>B-800 &amp; B-1000 (Trinocular head)</b>	M-699	M-699	M-620.1
<b>B-800 &amp; B-1000 ERGO (Binocular head)</b>	NO	READY TO USE	NO
<b>B-800 &amp; B-1000 ERGO (Trinocular head)</b>	READY TO USE	READY TO USE	M-114
<b>XDS-2 (Trinocular head)</b>	READY TO USE – FREE TO MOVE 360 DEGREE	READY TO USE	M-778
<b>XDS-3 (Trinocular head)</b>	M-699	M-699	M-789.1
<b>XDS-2ERGO (Trinocular connection)</b>	READY TO USE	READY TO USE	M-114
Stereomicroscopes			
<b>STX (Binocular head)</b>	NO	READY TO USE	NO
<b>MS-2 (Binocular head)</b>	NO	READY TO USE	NO
<b>S-10-20-30-40-45-50 (Binocular head)</b>	NO	M-113.2	NO
<b>LAB-10 LAB-20 (Binocular head)</b>	NO	READY TO USE	NO
<b>SZM (Binocular head)</b>	NO	READY TO USE	NO
<b>SZM (Trinocular head)</b>	READY TO USE – FREE TO MOVE 360 DEGREE	READY TO USE	ST-090.1
<b>SZN (Binocular head)</b>	NO	READY TO USE	NO
<b>SZN (Trinocular head)</b>	READY TO USE – FREE TO MOVE 360 DEGREE	READY TO USE	ST-147.1
<b>SZP (Binocular head)</b>	NO	READY TO USE	NO
<b>SZP (For Trinocular connection)</b>	ST-170	ST-170	ST-170 + M-114
<b>SZM-SMD (Trinocular head)</b>	READY TO USE – FREE TO MOVE 360 DEGREE	READY TO USE	ST-090
<b>SZM-GEM-1 (Binocular head)</b>	NO	READY TO USE	NO
<b>SZM-GEM-2 (Trinocular head)</b>	Not Suggested	READY TO USE	ST-090
<b>OPTIGEM-3 (Binocular head)</b>	NO	READY TO USE	NO
<b>OPTIGEM-4 (Trinocular head)</b>	Not Suggested	READY TO USE	ST-147.1
<b>OPTIGEM-1 (Binocular head)</b>	NO	READY TO USE	NO
<b>OPTIGEM-2 (Trinocular head)</b>	Not Suggested	READY TO USE	ST-090
<b>XC-100L (Monocular head)</b>	NO	READY TO USE	NO
<b>XZ-1 (Monocular head)</b>	NO	READY TO USE	NO
<b>XZ-2 (Binocular head)</b>	NO	READY TO USE	NO

# Adapter reference list - PRO Cool 5 & PRO HDMI & DIGI

	With NO ADAPTER	With NO ADAPTER	With ADAPTER
	OPTIKAM PRO COOL 5	OPTIKAM Pro HDMI	DIGI
Biological microscopes			
<b>B-20 - M-100FL (Monocular head)</b>	M-116	M-114	READY TO USE
<b>B-50 (Monocular head)</b>	M-116	M-114	READY TO USE
<b>B-150 (Monocular and binocular head)</b>	M-116	M-114	READY TO USE
<b>B-191 (Monocular head)</b>	M-116	M-114	READY TO USE
<b>B-192 (Binocular head)</b>	M-116	M-114	READY TO USE
<b>B-193 (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>B-292 (Binocular head)</b>	M-116	M-114	READY TO USE
<b>B-293 (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>B-382 (Binocular head)</b>	M-116	M-114	READY TO USE
<b>B-383 (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>B-500 (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>B-500 (Trinocular head)</b>	M-699 + M-116	M-620.1	M-699
<b>B-500 ERGO (binocular head ONLY)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>B-500Ti-* (Multihead) for Binocular head</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>B-500Ti-* (Multihead) for Trinocular head</b>	M-116	M-114	READY TO USE
<b>B-800 &amp; B-1000 (Trinocular head)</b>	M-699 + M-116	M-699 + M-114	M-699
<b>B-800 &amp; B-1000 ERGO (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>B-800 &amp; B-1000 ERGO (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>XDS-2 (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>XDS-3 (Trinocular head)</b>	M-699 + M-116	M-789.1	M-699
<b>XDS-2ERGO (Trinocular connection)</b>	M-116	M-114	READY TO USE

## Stereomicroscopes

<b>STX (Binocular head)</b>	NO	NO	READY TO USE
<b>MS-2 (Binocular head)</b>	M-116	M-114	READY TO USE
<b>S-10-20-30-40-45-50 (Binocular head)</b>	M-116 + M-113.2	M-114 + M-113.2	M-113.2
<b>LAB-10 LAB-20 (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>SZM (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>SZM (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>SZN (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>SZN (Trinocular head)</b>	M-116	ST-147.1	READY TO USE
<b>SZP (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>SZP (For Trinocular connection)</b>	ST-170 + M-116	ST-170 + M-114	ST-170
<b>SZM-SMD (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>SZM-GEM-1 (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>SZM-GEM-2 (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>OPTIGEM-3 (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>OPTIGEM-4 (Trinocular head)</b>	M-116	ST-147.1	READY TO USE
<b>OPTIGEM-1 (Binocular head)</b>	M-116 + M-113.1	M-114 + M-113.1	READY TO USE
<b>OPTIGEM-2 (Trinocular head)</b>	M-116	M-114	READY TO USE
<b>XC-100L (Monocular head)</b>	M-116	M-114	READY TO USE
<b>XZ-1 (Monocular head)</b>	M-116	M-114	READY TO USE
<b>XZ-2 (Binocular head)</b>	M-116	M-114	READY TO USE

# Adapter reference list - VC Series & EDUCAM

	With NO ADAPTER	With ADAPTER	With ADAPTER
	VC-02 or VC-03	VC-01 or VC-04	EDUCAM
Biological microscopes			
Only for "c" mount - Trino microscopes			
<b>B-20 - M-100FL (Monocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-50 (Monocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-150 (Monocular and binocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-191 (Monocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-192 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-193 (Trinocular head)</b>	M-114	READY TO USE	READY TO USE
<b>B-292 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-293 (Trinocular head)</b>	M-114	READY TO USE	READY TO USE
<b>B-382 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-383 (Trinocular head)</b>	M-114	READY TO USE	READY TO USE
<b>B-500 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-500 (Trinocular head)</b>	M-620	M-699	M-699
<b>B-500 ERGO (binocular head ONLY)</b>	NO	READY TO USE	READY TO USE
<b>B-500Ti-* (Multihead) for Binocular head</b>	NO	READY TO USE	READY TO USE
<b>B-500Ti-* (Multihead) for Trinocular head</b>	M-778	READY TO USE	READY TO USE
<b>B-800 &amp; B-1000 (Trinocular head)</b>	M-620	M-699	M-699
<b>B-800 &amp; B-1000 ERGO (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>B-800 &amp; B-1000 ERGO (Trinocular head)</b>	M-114	READY TO USE	READY TO USE
<b>XDS-2 (Trinocular head)</b>	M-778	READY TO USE	READY TO USE
<b>XDS-3 (Trinocular head)</b>	M-789	M-699	M-699
<b>XDS-2ERGO (Trinocular connection)</b>	M-114	READY TO USE	READY TO USE
Stereomicroscopes			
<b>STX (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>MS-2 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>S-10-20-30-40-45-50 (Binocular head)</b>	NO	M-113.2	M-113.2
<b>LAB-10 LAB-20 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>SZM (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>SZM (Trinocular head)</b>	ST-090	READY TO USE	READY TO USE
<b>SZN (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>SZN (Trinocular head)</b>	ST-147	READY TO USE	READY TO USE
<b>SZP (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>SZP (For Trinocular connection)</b>	ST-170 + ST-174	ST-170	ST-170
<b>SZM-SMD (Trinocular head)</b>	ST-090	READY TO USE	READY TO USE
<b>SZM-GEM-1 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>SZM-GEM-2 (Trinocular head)</b>	ST-090	READY TO USE	READY TO USE
<b>OPTIGEM-3 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>OPTIGEM-4 (Trinocular head)</b>	ST-147	READY TO USE	READY TO USE
<b>OPTIGEM-1 (Binocular head)</b>	NO	READY TO USE	READY TO USE
<b>OPTIGEM-2 (Trinocular head)</b>	ST-090	READY TO USE	READY TO USE
<b>XC-100L (Monocular head)</b>	NO	READY TO USE	READY TO USE
<b>XZ-1 (Monocular head)</b>	NO	READY TO USE	READY TO USE
<b>XZ-2 (Binocular head)</b>	NO	READY TO USE	READY TO USE

# Adapter reference list - REFLEX CAMERAS

	APS Sensor + T/2 BOUGHT BY CUSTOMER	FULL Frame / 35mm SRL Cameras + T/2 BOUGHT BY CUSTOMER	MIRROR-LESS + T/2 BOUGHT BY CUSTOMER
Biological microscopes			
<b>B-20 - M-100FL (Monocular head)</b>	M-173	M-173	M-173
<b>B-50 (Monocular head)</b>	M-173	M-173	M-173
<b>B-150 (Monocular and binocular head)</b>	M-173	M-173	M-173
<b>B-191 (Monocular head)</b>	M-173	M-173	M-173
<b>B-192 (Binocular head)</b>	M-173	M-173	M-173
<b>B-193 (Trinocular head)</b>	M-173	M-173	M-173
<b>B-292 (Binocular head)</b>	M-173	M-173	M-173
<b>B-293 (Trinocular head)</b>	M-173	M-173	M-173
<b>B-382 (Binocular head)</b>	M-173	M-173	M-173
<b>B-383 (Trinocular head)</b>	M-173	M-173	M-173
<b>B-500 (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>B-500 (Trinocular head)</b>	M-699+M-173	M-619	M-699+M-173
<b>B-500 ERGO (binocular head ONLY)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>B-500Ti-* (Multihead) for Binocular head</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>B-500Ti-* (Multihead) for Trinocular head</b>	M-173	M-173	M-173
<b>B-800 &amp; B-1000 (Trinocular head)</b>	M-699+M-173	M-699+M-173	M-699+M-173
<b>B-800 &amp; B-1000 ERGO (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>B-800 &amp; B-1000 ERGO (Trinocular head)</b>	M-173	M-173	M-173
<b>XDS-2 (Trinocular head)</b>	M-173	M-173	M-173
<b>XDS-3 (Trinocular head)</b>	M-699+M-173	M-788	M-699+M-173
<b>XDS-2ERGO (Trinocular connection)</b>	M-173	M-173	M-173
Stereomicroscopes			
<b>STX (Binocular head)</b>	M-173	M-173	M-173
<b>MS-2 (Binocular head)</b>	M-173	M-173	M-173
<b>S-10-20-30-40-45-50 (Binocular head)</b>	M-173 + M-113.2	M-173 + M-113.2	M-173 + M-113.2
<b>LAB-10 LAB-20 (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>SZM (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>SZM (Trinocular head)</b>	M-173	ST-089	M-173
<b>SZN (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>SZN (Trinocular head)</b>	M-173	ST-146	M-173
<b>SZP (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>SZP (For Trinocular connection)</b>	ST-170+M-173	ST-170 + M-173	ST-170+M-173
<b>SZM-SMD (Trinocular head)</b>	M-173	ST-089	M-173
<b>SZM-GEM-1 (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>SZM-GEM-2 (Trinocular head)</b>	M-173	ST-089	M-173
<b>OPTIGEM-3 (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>OPTIGEM-4 (Trinocular head)</b>	M-173	ST-146	M-173
<b>OPTIGEM-1 (Binocular head)</b>	M-173 + M-113.1	M-173 + M-113.1	M-173 + M-113.1
<b>OPTIGEM-2 (Trinocular head)</b>	M-173	ST-089	M-173
<b>XC-100L (Monocular head)</b>	M-173	M-173	M-173
<b>XZ-1 (Monocular head)</b>	M-173	M-173	M-173
<b>XZ-2 (Binocular head)</b>	M-173	M-173	M-173



# Video and photo applications - SOFTWARE SUITE


**OPTIKA VISION® LITE** is a software developed by OPTIKA® Microscopes with the main purpose to be a handy and simple tool for our customers using our OPTIKAMS and other digital microscope cameras. It has a simple user interface and can be used for image acquisition, line measurements and documentation. It is available in seven languages: English, Italian, French, Spanish, German, Swedish and Polish.

## Image and video Acquisition

You can capture still images using a live preview that allows to precisely focus your image and change image parameters in order to have a perfect final result. The image can be saved separately in BMP, JPG or TIFF formats. It is also possible to import saved images from other sources.

Moreover:

- Image stacks acquisition (adjustable time steps)
- Square or round grid on live preview
- Video acquisition function included.

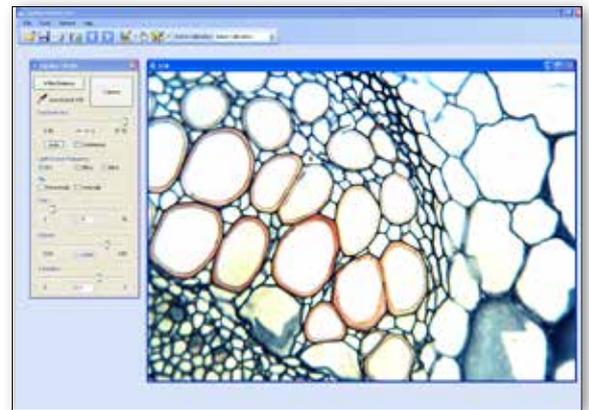


## Measurements

Linear in-scale measurements can be made in any unit you like, using a simple calibration and measurement tool.

The data can be exported to a spreadsheet document for further elaboration.

There is also the possibility to indicate special objects in the image and to write comments.

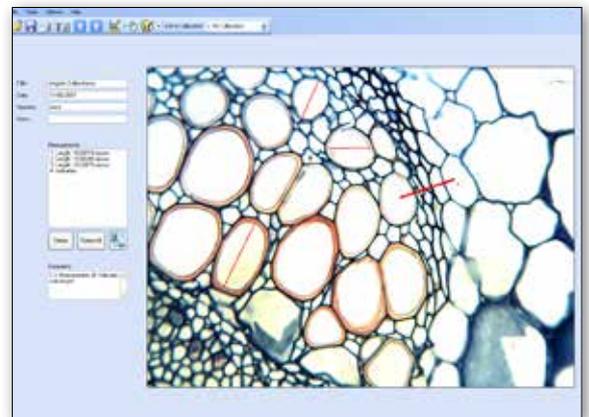


## Documentation

A report can be generated simply by printing the document on a normal printer or to a PDF. The document can be personalized with your own logo.



# Video and photo applications - SOFTWARE SUITE

**OPTIKA VISION® PRO** is a new generation of microscope image analysis instruments, especially developed for our Optikam Pro series, which contains various tools for processing and analysis of digital microscope images. It includes powerful tools for image capturing, adjusting, operating and measuring. You have also the possibility to create your own database for easy organisation and storage of your images.

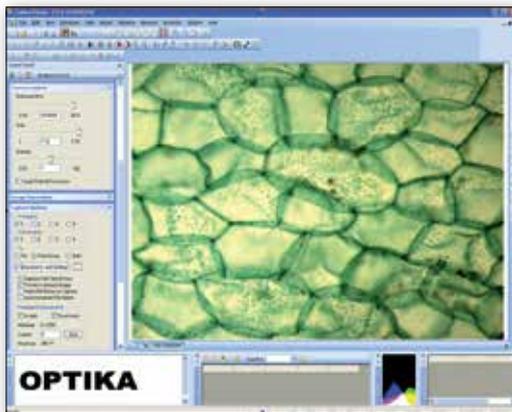


## Image Acquisition

Optika Vision® Pro allows still image acquisition with several possibilities to control the image output according to your needs. There are functions such as white balance, automatic exposure, frame average, sub-sampling, hue, saturation and intensity controls, to mention a few.



## Post Elaboration and Measurements

Optika Vision® Pro also offers the possibility to make various types of enhancements and adjustments of the captured image and calibrated measurements of lines, angles and areas. You can also perform manual counting and measure the light density of your acquired image.

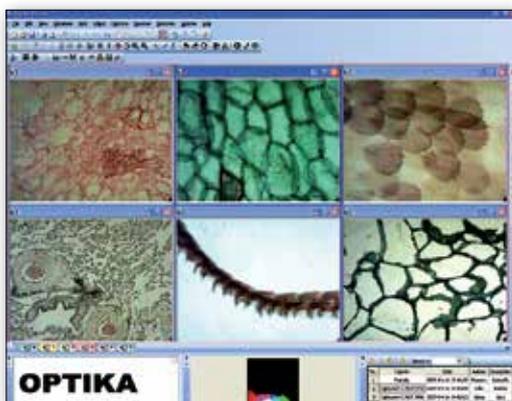

## Organize your work

For easy storage and fast upload you can organize your images into a database where it is possible to search for the images using keywords. In Optika Vision® Pro you can also arrange images into groups in order to combine them calculate the average or create a multi-focus composition.





# Video and photo applications - SOFTWARE SUITE

**OPTIKA VISION® PRO PLUS** is a software version just for your PRO3 camera which, having a powered internal clock, allows a faster frame rate and additional useful functions such as:

- exposure time up to 1000msec.
- snap exposure time up to 26 sec, very useful when the light source is weak.
- automatic live image brightness on the screen.


and furthermore :

- a simple to use live zoom bar, very helpful to get the better focusing point.
- automatic cells counting ( based on RGB colours )
- direct measurement on live view

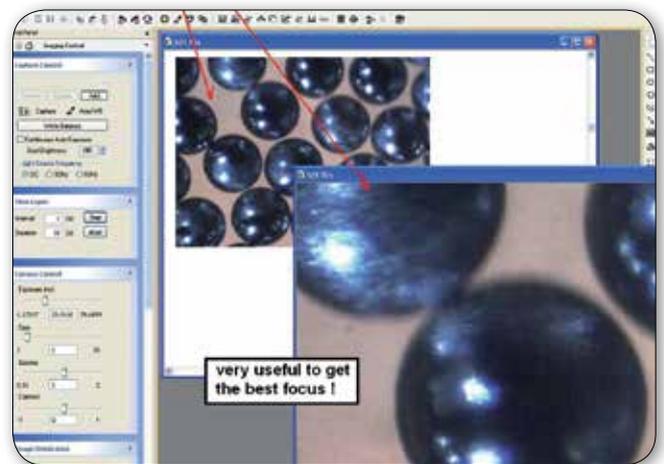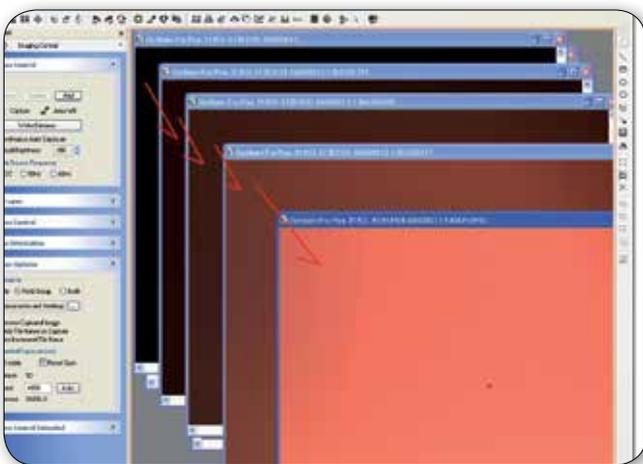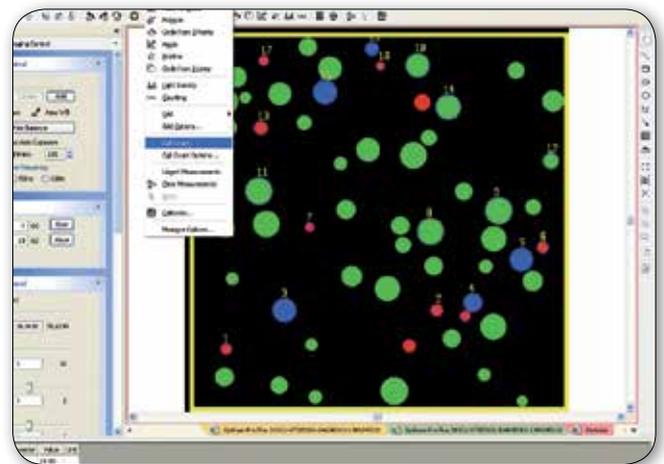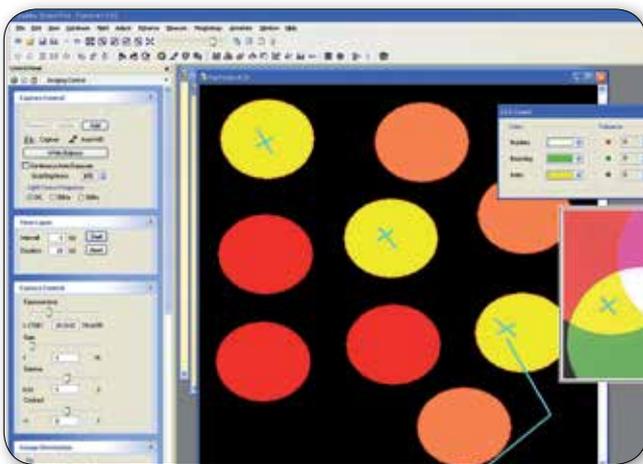




# Video and photo applications - SOFTWARE SUITE

**OPTIKA VIEW** is a new generation of microscope image analysis instruments, especially developed for our Optikam Budget and Pro Cool series, which contains various tools for processing and analysis of digital microscope images. It includes powerful tools for image capturing, adjusting, operating and measuring.

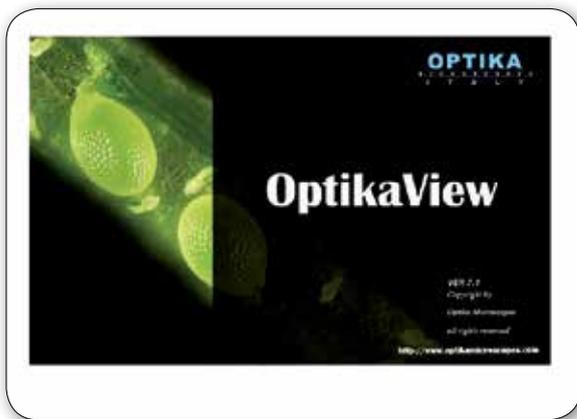

## Image Acquisition

Optika View allows still image acquisition with several possibilities to control the image output according to your needs. There are functions such as white balance, automatic exposure, frame average, sub-sampling, hue, saturation and intensity controls, to mention a few.

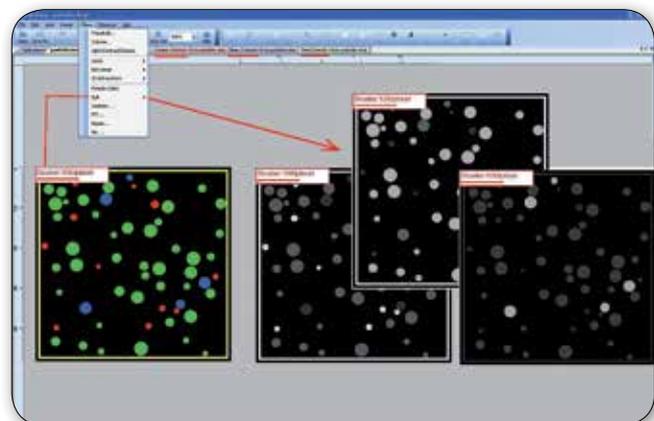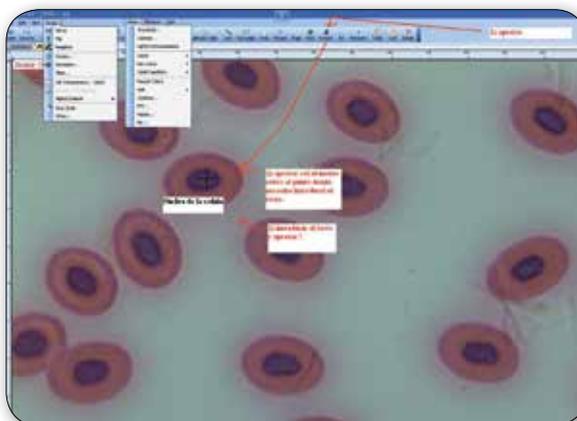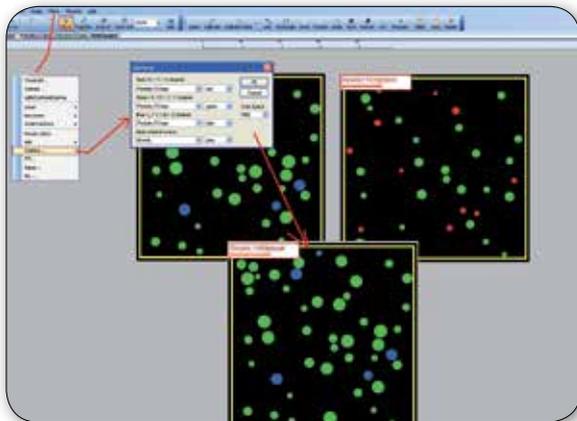




# OPTIKA - SOFTWARE SUITE

## OPTIKA MiPro

OPTIKA MiPro is a new generation of microscope image analysis instruments, especially developed for our Optikam B0.5 and B2 cameras, which contains simple tools for processing and analysis of digital images. It includes powerful tools for image capturing, adjusting, operating and measuring.

### Image Acquisition

Optika MiPro allows still image acquisition with several possibilities to control the image output according to your needs. There are functions such as white balance, automatic exposure, frame average, sub-sampling, hue, saturation and intensity controls, to mention a few.

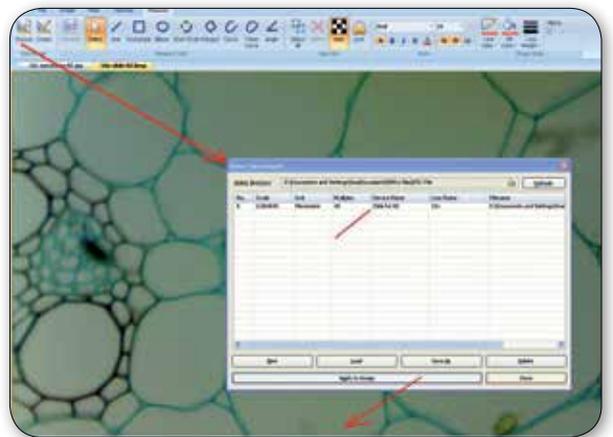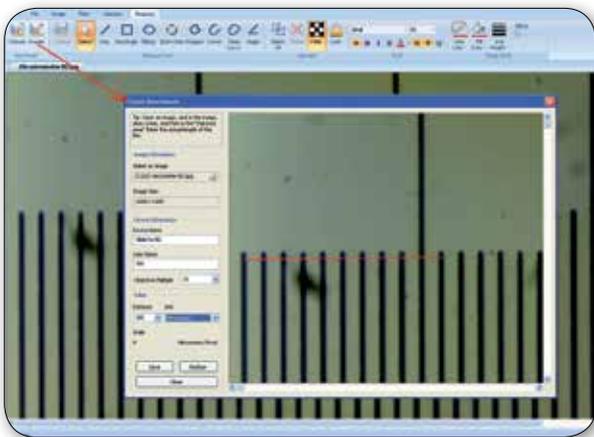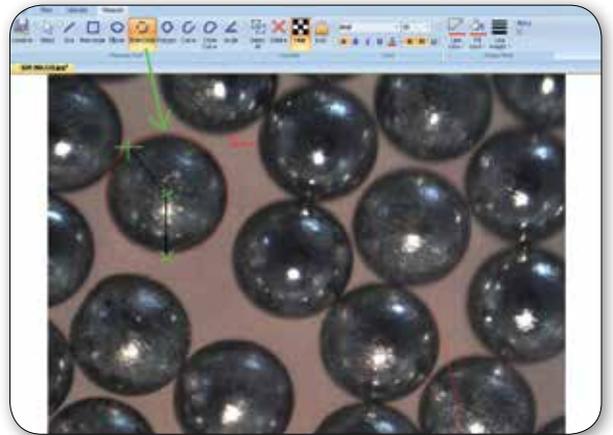

# OPTIKA - SOFTWARE SUITE

## **FREWARE**

The Optika Vision® software package also contains a bundle of imaging, video and image analysis software that are freely available from the Internet. They are provided free of charge, according to the original license, as an aid in the use of your Optika product.

## **Emamcapture**

AMCap is a small yet fully functional video capture and preview application compatible with Microsoft™ DirectShow (formerly ActiveMovie, hence the name). It is based on the sample AMCap source code from the Microsoft DirectX 9 SDK.

## **GIMP**

GIMP is the GNU Image Manipulation Program. It is a freely distributed advanced software for tasks such as photo retouching, image composition and image authoring. It works on many operating systems, in many languages.

## **Combine Z**

This small software combines pictures to increase depth of focus.

## **Image Tool (not for Windows 64bit)**

ImageTool is an advanced image processing and analysis program for Windows. It can acquire, display, edit, analyze, process, compress, save and print greyscale and colour images. It can read and write over 22 common file image formats.

Image analysis functions include dimensional (distance, angle, perimeter, area), automatic (or manual) object/cell counting and full analysis functions, and greyscale measurements (point, line and area histogram with statistics). ImageTool supports standard image processing functions such as contrast manipulation, sharpening, smoothing, edge detection, median filtering and spatial convolutions with user-defined convolution masks.

ImageTool also has built-in scripting capabilities that allow the user to record repetitive tasks and playback saved scripts to automate image analysis. ImageTool was designed with an open architecture that provides extensibility via a variety of plug-ins for example image acquisition using either Adobe Photoshop plug-ins or Twain scanners is built-in.

ImageTool provides for geometric transformations and magnification up to four levels. All analysis and processing functions are available at any magnification factor.

ImageTool also provides for image annotation with text, arrows, rectangle, ellipses and polygon.

## **MBF ImageJ**

ImageJ is a public domain Java image processing program that runs on any computer with a Java 1.4 or later virtual machine.

It can display, edit, analyze, process, save and print 8-bit, 16-bit and 32-bit images of various image formats. It supports "stacks", a series of images that share a single window. It is multithreaded, so time-consuming operations such as image file reading can be performed in parallel with other operations.





---

## Headquarters and Manufacturing Facilities

---

**OPTIKA® S.r.l.** Via Rigla, 30 - 24010 Ponteranica (BG) - ITALIA - Tel.: +39 035.571.392 - Fax: +39 035.571.435 - [info@optikamicroscopes.com](mailto:info@optikamicroscopes.com)

## Optika Sales branches

---

**OPTIKA® Spain** [spain@optikamicroscopes.com](mailto:spain@optikamicroscopes.com)

**OPTIKA® China** [china@optikamicroscopes.com](mailto:china@optikamicroscopes.com)

**OPTIKA® USA** [usa@optikamicroscopes.com](mailto:usa@optikamicroscopes.com)

**OPTIKA® Hungary** [hungary@optikamicroscopes.com](mailto:hungary@optikamicroscopes.com)

---